

COMPARATIVA FILTROS TREPOVI

Filtros con placa de crepinas

Filtro START




Filtro industrial




COMPARATIVE OF TREPOVI FILTERS

Filters with nozzle plate

START Filter

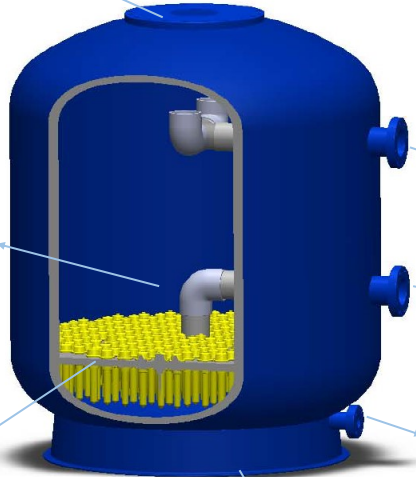

Top manhole in GFRP, with inserted bolts.



Outlet over the nozzles plate, through the bed

Inlet flange, in PVC

Outlet flange, in PVC

Drain flange, in PVC (not total emptying)




Base, in GFRP


Plate in GFRP, with nozzles, with expansion screw



Industrial Filter

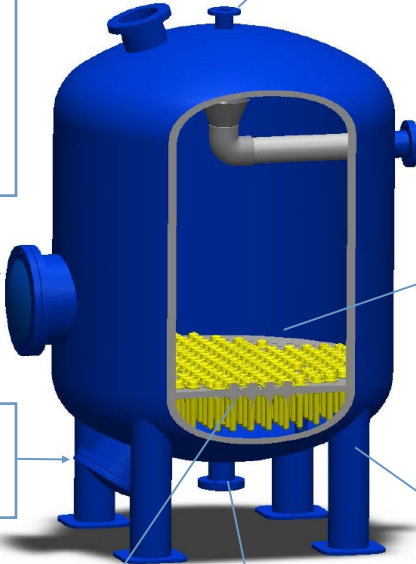

Side manhole, in GFRP, with removable bolts



Bottom manhole, in GFRP

Flange, in GFRP, for sand filling

Security flange, in GFRP

Inlet flange, in GFRP

Bed without obstacles (without outlet pipe)

Legs in GFRP. Minimum height of 400 mm, adaptable according to customer needs.



Plate in GFRP (nozzles with nut)



Outlet flange, in GFRP (total emptying)