

FILTERS WITH NOZZLE PLATE

Comparative of Trepovi filters


START filter

Top manhole in GFRP, with inserted bolts



Outlet over the nozzles plate, through the bed

Plate in GFRP, with nozzles, with expansion screw

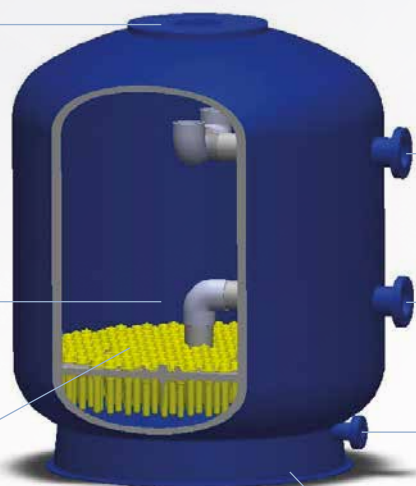

Inlet flange, in PVC

Outlet flange, in PVC

Drain flange, in PVC (not total emptying)

Base, in GFRP



INDUSTRIAL filter

Flange, in GFRP, for sand filling


Security flange, in GFRP



Side manhole, in GFRP, with removable bolts

Bottom manhole, in GFRP

Plate in GFRP (nozzles with nut)

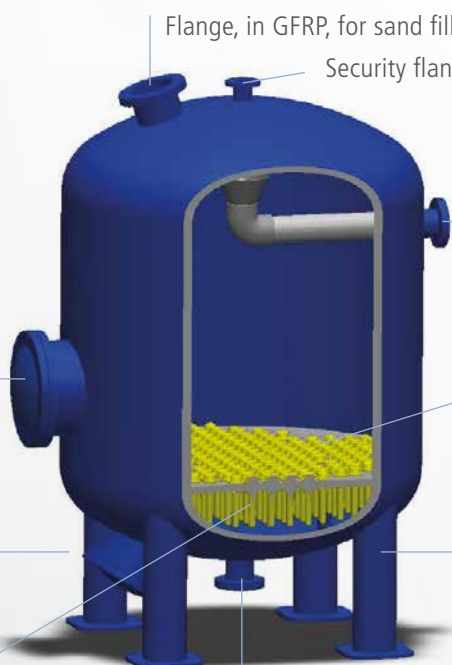

Inlet flange, in GFRP

Bed without obstacles (no outlet pipe)

Legs in GFRP. Minimum height of 400 mm, adaptable according to customer needs.

Outlet flange, in GFRP (total emptying)



FILTERS WITH COLLECTOR ARMS

Comparative of Trepovi filters


START filter

Top manhole in GFRP, with inserted bolts



Outlet over the collector arm, through the bed

Bayonet collector

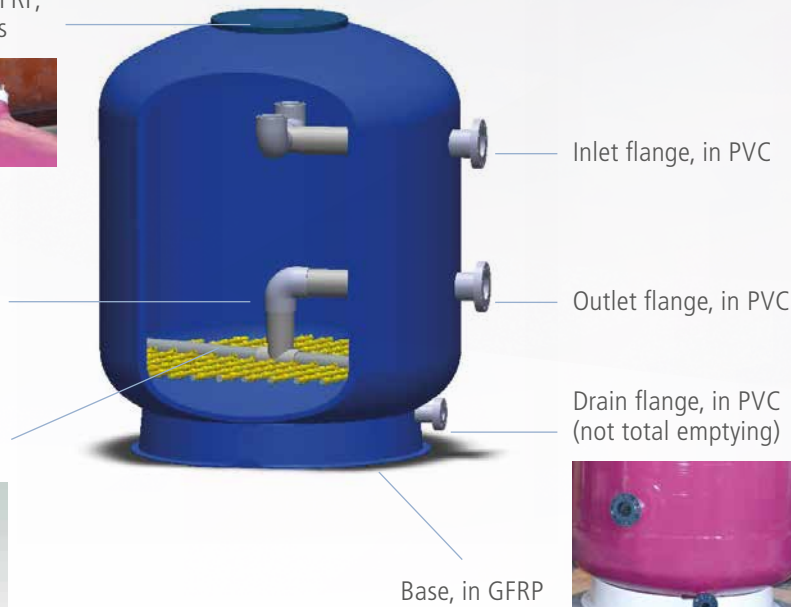

INDUSTRIAL filter

Flange, in GFRP, for sand filling

Security flange, in GFRP



Side manhole, in GFRP, with removable bolts

Threaded collector

